

The RADLAB was developed specifically for the metal industries and environmental control to provide the highest degree of accuracy in measured samples for its specific radiological content and activity.

- Full scale Isotope analysis
- Full scanning times
- Quick scan feature (Optional)
- Full network capabilities for system monitoring and servicing
- Large 6" (152mm) diameter WELL to accommodate different sample sizes



RADLAB

LABORATORY GAMMA SPECTROMETER

Detect and identify specific radioactive isotopes in same sample

The RADLAB spectrometer utilizes only the highest quality Thallium doped Sodium Iodide crystal, combined with state-of-the-art electronics and software. The result is the ability to distinguish between multiple isotopes and specific activity levels in the same sample. Results are quickly displayed and a report is generated.

Simplified and Flexible

The RADLAB system uses a Windows™ based environment and the user based interface software utilizes a systematic approach to the step by step sequences when stabilizing the system, taking measurements and filling in data. There are no complex steps that are required to ensure the system is calibrated and taking measurements correctly. Connecting the RADLAB to the outside world is a TCP/IP connection and a serial port. All system functions can be accessed remotely via a network connection.

International Atomic Energy Association (I.A.E.A.)

The RADLAB's design was focused on the I.A.E.A. recommended release limits. The user interface software is extremely flexible allowing the user to configure the RADLAB to best suit the applications library requirements.

RADLAB Gamma Spectrometer System consists of:

Detector Case

- Detector case: 24"H (60cm) x 24"L (60cm) x 16"W (40cm)
- Outer detector case: Painted aluminum
- Shielding material: Lead and copper
- System weight: 450lbs (204 Kg)
- Maximum sample Well size: 6" (15cm) Diameter x 6" (15cm) High

Electronics


- Detection material: 21 in³ (0.35L) Sodium Iodide, Thallium Doped (NaI(Tl))
- Integral PMT with EM shielding
- High speed DSP circuitry with High SNR
- Ultra stable high voltage software adjustable
- Controller with FPGA technology
- Internal memory: 2GB RAM
- Hard drive: 120 GB
- Serial port
- Two USB ports (2.0)
- RJ45 10/100 network port
- High resolution touchscreen LCD display
- 110/220V 50/60Hz auto-selectable

Software

- Windows™ based operating system with Intel processor
- Windows™ based RADLAB application software
- Easy to use menu driven interface with touchscreen
- Configurable data storage with backup
- Easy to use graphic user interface
- Live data analysis, report generation
- Fully remote access with software and hardware service capability

Spectrometer Specifications

- Energy resolution 8.5% or better for 662 KeV
- Number of channels: 512
- Energy range: 30 KeV to 3.0 MeV (Gamma)
- Sensitivity calibration: Covers entire energy range
- System software monitor with operator alert

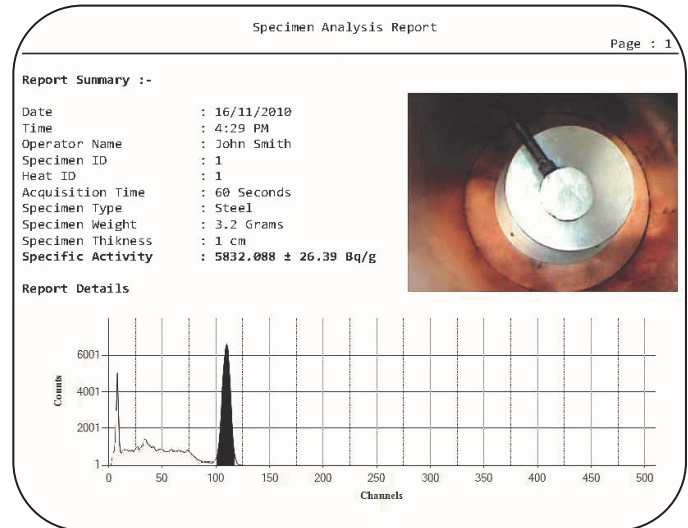

RADLAB Options

- Scale – Used to weigh sample and download directly into RADLAB system
- Digital Camera - Photograph the sample and include a photo of the sample in question with the evaluation report
- UPS battery back up
- Quick Scan Mode – Counts Per Second mode



Corporate Head Office

Scott Aikin
Saikin@radcommsystems.com
Jeff Adams
jadams@radcommsystems.com
2931 Portland Drive
Oakville, ON Canada L6H 5S4
Tel. +1 (905) 829-8290
Toll Free. 1 (800) 588-5229
Fax. +1 (905) 829-1406

USA

Joshua Hunter
jhunter@radcommsystems.com
602 E. Lincolnway Ave.
Valparaiso, IN USA 46383
Tel. +1 (773) 680-8430
Toll Free. 1 (800) 588-5229
Fax. +1 (219) 510-5764

Europe

Wim van Hove
wim.van.hove@radcommeurope.com
Watertorenweg 32, 2230 Herselt, Belgium
Tel. +32.14.75.02.13
Fax. +32.14.75.02.16

China

Zhenhau Wang
wang.zhenhau@ehc-global.com
212-215 Malu Industrial Park, No. 58
Chen Bao Rd., Jiading
Shanghai, 201801, China
Tel. +86-21-69153031
Fax. +86-21-69153231

Latin America

Eduardo Ballesteros
analiticacontrol@prodginy.net.mx
Amatista No.27, El Pedregal
Atizapan de Zaragoza, 52948, Estado De Mexico
Tel. (52) 55 5077 4633/ (52) 55 3615 4910

Black Sea

Osman Tureyyen
metkim@metkim.com
Kavacik, Onarimli Sokak
No 9 Altay Han
Daire: 8 Beykoz, Istanbul, Turkey
Tel. +90 (216) 425-1412
Fax. +90 (216) 425-1432

India

Neelakshi Bhargava
neelakshi@radcommsystems.co.in
C-34, Ground Floor, Sawan Park, Ashok Vihar
New Delhi 110052, India
Tel. +91-9717671924
Fax. +91-9818650118